



75 Palmer Industrial Road, P.O. Box 4007
Williamsport, PA 17701 USA
1.800.451.1420

sales@pdcspas.com
www.pdcspas.com
www.pdcspasinternational.com

The manufacturer reserves the right to change product as deemed necessary without notification. As a manufacturer we stand behind our products in accordance to our written limited warranty. All measurements and dimensions are approximates. Your retailer is an independent business operator not employed by the manufacturer. PDC Spas, Plastic Development Co, Inc., can not accept responsibility for any representations, statements, or contracts made by any retailer beyond the parameters of our warranty.

REV. 201607

Swim Spa Installation and Delivery Guide



PROUDLY MANUFACTURING IN
THE USA SINCE 1957.




Swim Spa Step Unit Specifications

PermaWood™ Swim Spa Steps

69" high to top of railing
32" high to top of landing
41" wide
62" long

Available in Graphite Gray or Espresso Brown.
Black metal railing standard.

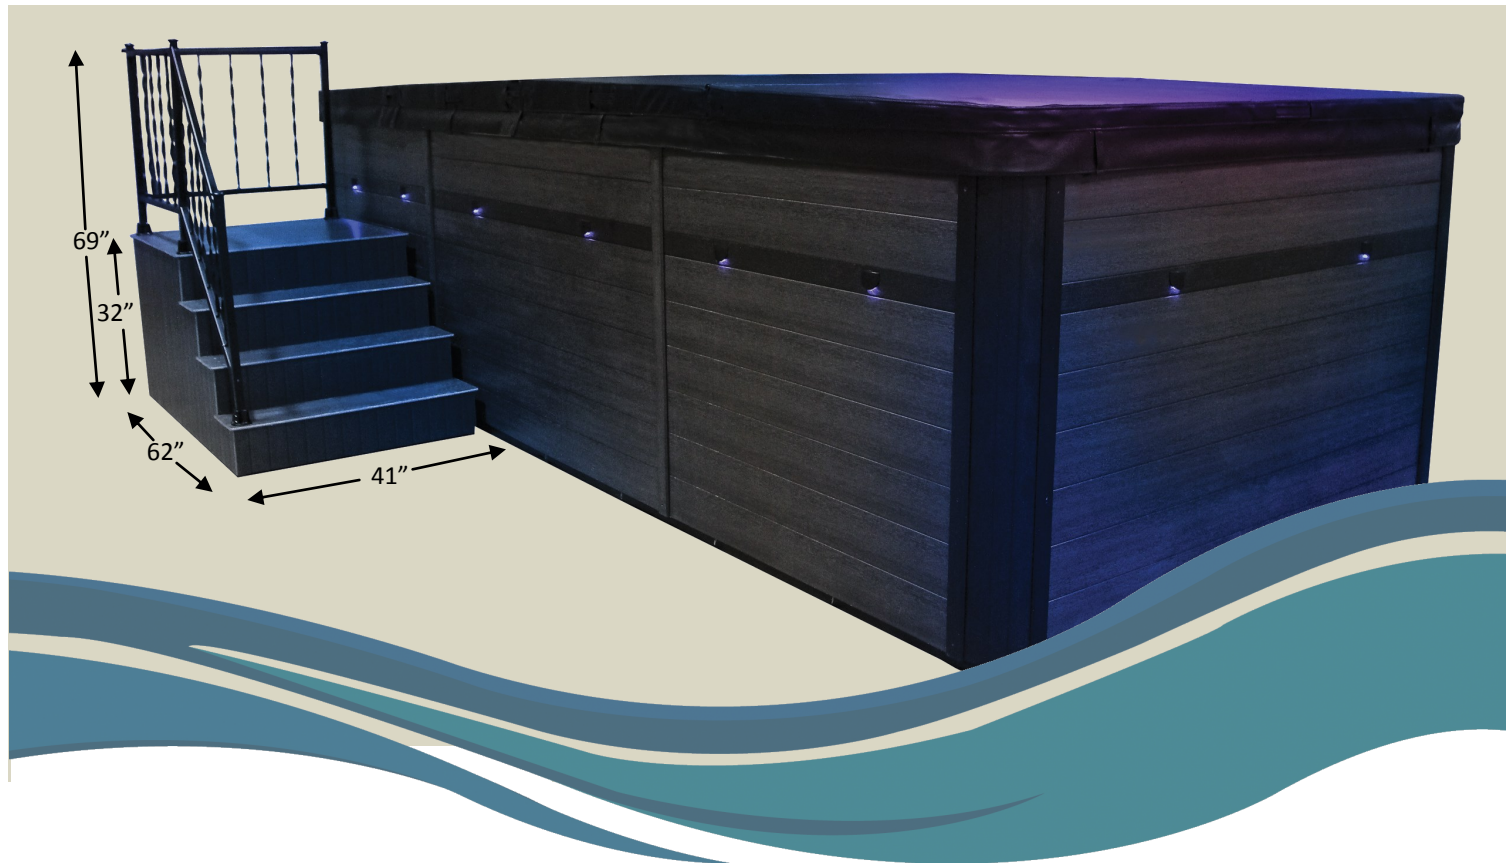

Congratulations on your swim spa purchase!

You can look forward to many years of enjoyment and a healthier lifestyle.



SYNERGY™
TruSwim™

Site Preparation Guidelines

Swim Spa installation can be quick and simple if these guidelines are considered in planning the site. Please read the following information carefully. Proper planning will make the delivery and install more economical and efficient and the proper site selection will increase your year-round enjoyment.


Access from delivery point to final site: Consider the route from where the unit is delivered to the installation site. The steepness of grade, trees, shrubs, gates, roof overhangs, cables and overhead wires need consideration. Outside dimensions of your model choice can be used to determine clearance required for the move. Review outdoor and indoor installation suggestions prior to choosing your swim spa location.



It is common to have swim spas moved with the use of a crane onto the site of your choice. This is an easy solution to locate your new swim spa in what may be the most advantageous area of your home, an area not accessible with the normal means of delivery. Do not be intimidated with the size of your swim spa or the use of a crane. Thousands of owners have positioned their swim spa in a prime location with the use of a crane. Do not compromise the spot best suited for your full swim spa enjoyment because of installation concerns. Talk to your retailer or the factory for further guidance in necessary.



Surface Requirements: Your swim spa should be placed on a level concrete pad designed to support 26,000 lbs. (11,793 kg.). Do not place the swim spa on a dirt surface or directly on the ground. Once you have a location selected, there are several issues you should consider in preparing the site for the swim spa installation.

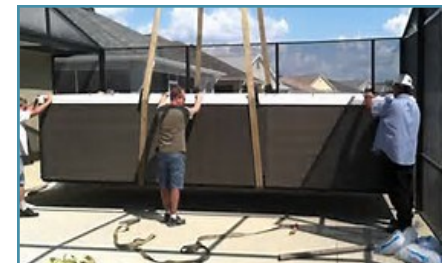

A flat, level surface strong enough to support your swim spa is mandatory. Once your swim spa is filled, it has considerable weight. Make certain the location you choose can support a minimum of 200 lbs. (91 kg) per square foot load, per recommended guidelines. A reinforced concrete slab should be at least four inches thick with the reinforcing mesh or rod attached to a bond wire. To check the level of this surface, spray a hose on the surface and check for puddles or run-off. Make the necessary corrections assuring levelness prior to placement of your new swim spa. Structural damage to the swim spa resulting from the incorrect installation of placement on inadequate foundation is not covered in the swim spa's limited warranty.

General Considerations: Make sure your dimensions are correct as you prepare the site for your new swim spa. This Guide includes model dimensions and measurements as reference for your installation preparation. Contact the factory or your retailer should you require additional information. Allow a perimeter of the chosen ground surface to extend beyond the swim spa itself to provide a clean area for users to get in and out of the swim spa.



Model Specifications - TSX219



GENERAL rev. 2016/05

Seating Capacity	5 seats, fitness area
Shell Material	Acrylic
Fitness Area	118" approx.
Dimensions (Domestic)	227" x 92" x 56"
Dimensions (Export)	578 cm. x 234 cm x 142 cm.
Water Capacity	2525 Gallons (9,558 liters)
Dry Weight	2,675 lbs. (1213 kg.)
Skirt Material	Permawood™
Water Flow	8HP, Dual Propulsion 5000 GPM

WATER SYSTEM** (photo ref.)


EverPure™ Treatment System	OZ	2
Pristine Filter	F	1
PowerFlo Filter	F1	1
Slide Valves		6
MegaSwirl Jet	A	2
Large Euro Jet w/ Eyeball	E	16
Mega'ssage Jet	G	17
Ozone Jet	O	4
Safety Suction	U	12
Air Control	I	4
MotionGlow™ Light	L	2
Lighted Water Spouts	W	6
Water Spout Control	CV	2
Bypass Jet	B	2

SPECIAL FEATURES

Spa Pillows	2
Highlights2™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump #1	1	2.0 HP	2.0 HP
Spa Pump #2	2	4.0 HP	4.0 HP
Swim Spa Seating Pump	3	2.0 HP	2.0 HP
Electronics			
Electrical Can (spa end), (swim end)	6, 7	Waterway Neo 2100 Series(each)	Waterway Neo 2100 Series(each)
Voltage (spa end), (swim end)		120/240, 120/240	230 / 230
Amperage (spa end), (swim end)		50, 50	1x32, 1x32
Heater (spa end), (swim end)	H1, H2	5.5 KW, 5.5 KW	3.0 KW, 3.0 KW
Operation System			
Spa Side Control (spa end), (swim end)	8, 9	Waterway Neo 2100 Series(each)	Waterway Neo 2100 Series(each)

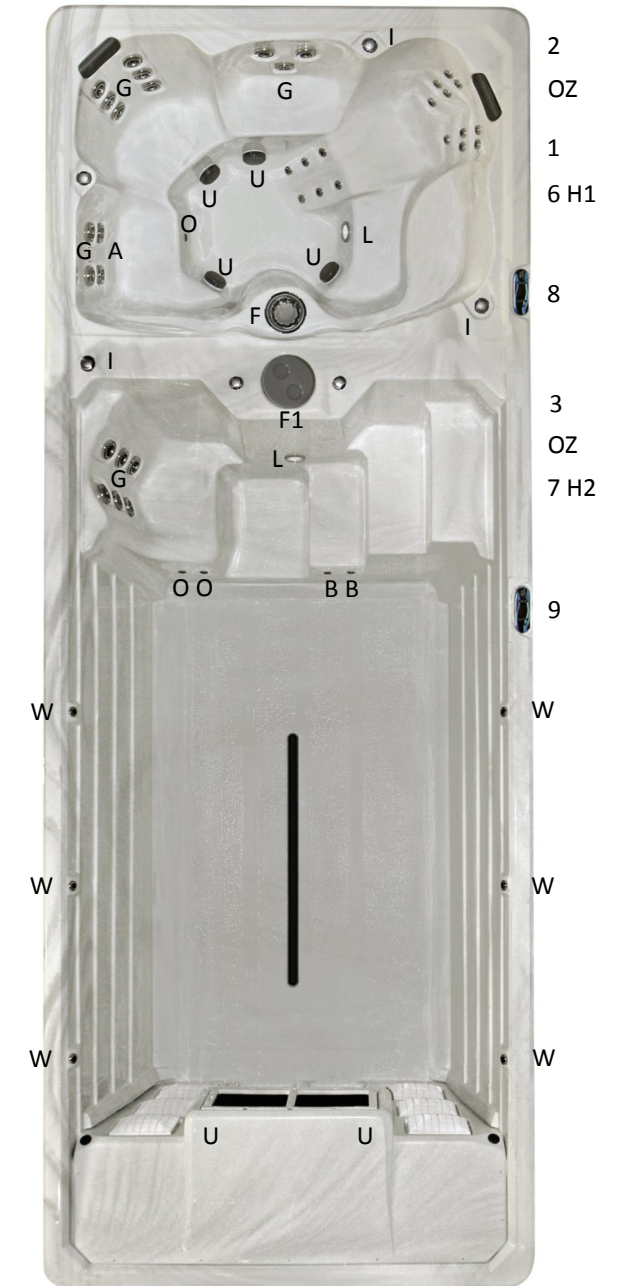

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install.

All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Model Specifications - TSX19



GENERAL rev. 2016/05

Seating Capacity	1 seat, fitness area
Shell Material	Acrylic
Fitness Area	160" approx.
Dimensions (Domestic)	227" x 92" x 56"
Dimensions (Export)	578 cm. x 234 cm x 142 cm.
Water Capacity	2700 Gallons (10,221 liters)
Dry Weight	1,990 lbs. (903 kg.)
Skirt Material	Permawood™
Water Flow	4HP, Dual Propulsion 5000 GPM

WATER SYSTEM** (photo ref.)

EverPure™ Treatment System	OZ	1
PowerFlo Filter	F1	2
Slide Valves		6
Large Euro Jet w/ Eyeball	E	26
Mega'ssage Jet	G	10
Ozone Jet	O	2
Diverter Valves	V	2
Safety Suction	U	8
Air Control	I	6
MotionGlow™ Light	L	1
Lighted Water Spouts	W	6
Water Spout Control	CV	2

SPECIAL FEATURES

Spa Pillows	1
Highlights™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*



ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump	1	4.0 HP	4.0 HP
Electronics			
Electrical Can	6	Waterway Neo 2100 Series	Waterway Neo 2100 Series
Voltage		120/240	230
Amperage		50	1x32
Heater	H	5.5 KW	3.0 KW
Operation System			
Main Spa Side Control	7	Waterway Neo 2100 Series	Waterway Neo 2100 Series

The swim spa location and the swim spa itself must be level before filling with water. Review Installing the Shim Guidelines found in the Owner's Manual under Ownership on the pdcspas.com site. This must be completed prior to filling your unit with water and an understanding of this procedure prior to installation is recommended.

Allow adequate space to access the equipment behind the four access panels on the swim spa cabinet. Review the pages in this manual referencing swim spa model specifications for the location of the support equipment for the model you have chosen.

Consider the size of a step unit that may be used with your swim spa in determining the dimensions of your concrete pad. PDC Spas offers a cabinet matching step with railing; refer to the specification page further in this guide for photos and measurements.

Note location of electric source into the unit prior to positioning on surface.

Leave ample access to the GFCI circuit breaker for testing and frequent access. Illustration of a typical GFCI can be found in this Guide.

A quick disconnect (manual disconnect) or GFCI is to be installed between 5 - 15 ft. (1.5-4.6 m) of the spa and within the line of sight from the unit. Consider where this can be located when selecting and preparing the spa site. All wiring must comply with the U.S. National Electric Code. **ALL EQUIPMENT MUST BE GROUND FAULT CIRCUIT PROTECTED (NOT SUPPLIED) AT THE POWER SOURCE. ALL ELECTRICAL WIRING OF THE SWIM SPA SUPPORT EQUIPMENT MUST COMPLY WITH THE NATIONAL ELECTRIC CODE.**



THIS IS A PROFESSIONAL GRADE PRODUCT. A KNOWLEDGE OF CONSTRUCTION TECHNIQUES, PLUMBING AND ELECTRICAL INSTALLATION ACCORDING TO CODES ARE REQUIRED FOR PROPER INSTALLATION AND USER SATISFACTION. WE RECOMMEND THAT A LICENSED CONTRACTOR PERFORM THE INSTALLATION. OUR WARRANTY DOES NOT COVER IMPROPER INSTALLATION-RELATED PROBLEMS.

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install. All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Installation Guidelines

All swim spa sides must be accessible for regular maintenance or in the event that service is required. General maintenance will require entry to equipment behind cabinet panels. It is recommended to allow 3 feet of access to all sides of the swim spa for routine and service maintenance. Your warranty does not include any cost associated with gaining access to equipment for servicing.

Indoor Installation Considerations

1. Local electrical and plumbing codes.
2. Ventilation fans and/or dehumidifiers should be provided to handle the high humidity developed by your swim spa. Walls, ceiling and wood trim resistance to moisture and water should be of consideration.
3. Chemicals will vaporize from the water and may cause an odor and possibly corrosion to certain home hardware. Never store chemicals inside the swim spa cabinet or where they may come into contact with water.
4. During the normal use of the swim spa, water will escape the swim spa vessel. Never place the swim spa on or over any material which may be damaged by this water or the chemicals within the water. Keep damage-able materials far enough away from the swim spa to avoid water damage, even if the spa should lose all its water.
5. Consider and prepare for the unlikely event of rapid swim spa drainage. If placement of the swim spa is permanent, you may wish to provide floor drains to accommodate draining, etc. Always leave space around the swim spa for easy access in case of repairs and maintenance, 3 ft. is suggested.
6. Consider and prepare for the unlikely event of swim spa removal.

7. Read 7-13 in the Outdoor Installation Considerations.

8. Do not set swim spa on finished floor without a waterproof barrier protection underneath.

9. The swim spa should have access to a power source capable of supplying 240 volts AC power. It must be wired directly into a grounded circuit with a Ground Fault Circuit Interrupter (G.F.C.I.) or equivalent RCD (not supplied), for export installs. No other appliances should be on the same circuit. Review typical GFCI installation in this Guide.


10. The swim spa should be close to a source of water.

11. Be sure the location you choose is stable. It must be able to support the weight of the swim spa when it is filled with water, plus the weight of the occupants. The swim spa may weigh up to 26,000 lbs (11,793 kg.) when it is filled with water. Contact a contractor or structural engineer to determine adequate support.

12. Do not use the swim spa above a finished living area, due to the risk of water damage.

13. The swim spa is not designed for in-floor installation. However, it is compatible with a deck system that is built flush with the top of the unit, provided adequate space for service is considered.

14. Be sure to note any other considerations, such as aesthetics or privacy concerns, that may affect the safety or enjoyment of using the swim spa.

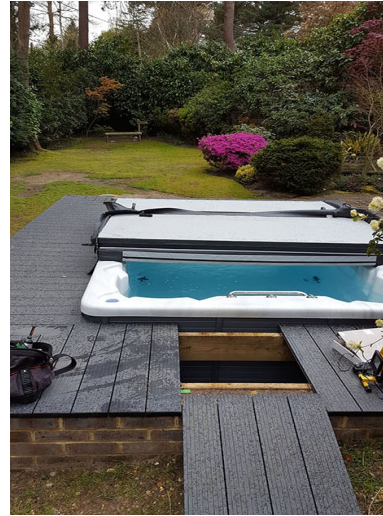

Model Specifications - TSX17



GENERAL rev. 2016/05

Seating Capacity	1 seat, fitness area
Shell Material	Acrylic
Fitness Area	124" approx.
Dimensions (Domestic)	204" x 92" x 56"
Dimensions (Export)	427 cm. x 234 cm x 142 cm.
Water Capacity	2420 Gallons (9,161 liters)
Dry Weight	1,985 lbs. (900 kg.)
Skirt Material	Permawood™
Water Flow	4HP, Dual Propulsion, 5000 GPM

WATER SYSTEM** (photo ref.)

EverPure™ Treatment System	OZ	1
PowerFlo™ Filter	F1	1
Slide Valves		2
Large Euro Jet w/Eyeball	E	18
Ozone Jet	O	2
Safety Suction	U	8
Air Control	I	1
MotionGlow™ Light	L	1
Lighted Water Spouts	W	6
Water Spout Control	CV	2

SPECIAL FEATURES

Spa Pillows	1
Highlights™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM

	Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump HP		1	4.0 HP	4.0 HP
Electronics				
Electrical Can		6	Waterway Neo 2100 Series	Waterway Neo 2100 Series
Voltage			120/240	230
Amperage			50	1x32
Heater		H	5.5 KW	3.0 KW
Operation System				
Main Spa Side Control		7	Waterway Neo 2100 Series	Waterway Neo 2100 Series



** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install. All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Model Specifications - TSX15



GENERAL rev. 2016/05

Seating Capacity	2 seats, fitness area
Shell Material	Acrylic
Fitness Area	114" approx.
Dimensions (Domestic)	180" x 92" x 56"
Dimensions (Export)	427 cm. x 234 cm x 142 cm.
Water Capacity	2340 Gallons (8,479 liters)
Dry Weight	1,845 lbs. (837 kg.)
Skirt Material	Permawood™
Water Flow	2HP, Dual Propulsion, 5000 GPM

WATER SYSTEM** (photo ref.)


EverPure™ Treatment System	OZ	1
PowerFlo™ Filter	F1	1
Slide Valves		2
Mega'ssage Jet	G	6
Ozone Jet	O	2
Safety Suction	U	8
Air Control	I	1
MotionGlow™ Light	L	1
Lighted Water Spouts	W	6
Water Spout Control	CV	2
Bypass Jet	B	2

SPECIAL FEATURES

Spa Pillows	0
Highlights™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump HP	1	2.0 HP	2.0 HP
Electronics			
Electrical Can	6	Waterway Neo 2100 Series	Waterway Neo 2100 Series
Voltage		120/240	230
Amperage		50	1x32
Heater	H	5.5 KW	3.0 KW
Operation System			
Main Spa Side Control	7	Waterway Neo 2100 Series	Waterway Neo 2100 Series

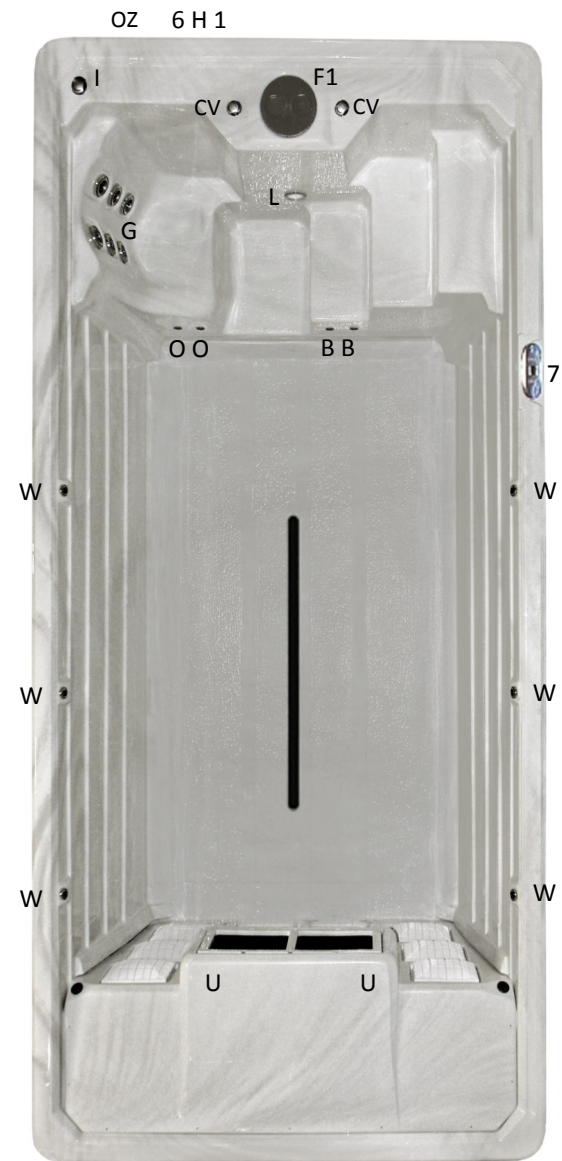

Outdoor Installation Considerations:

1. Local electrical and plumbing codes.
2. Consider local codes pertaining to fencing, enclosures, walls, electrical and plumbing. You will need to ensure that your swim spa is an adequate distance from power lines, both aboveground and underground. Your swim spa will also need to be childproofed.
3. View from house for aesthetics and supervisory needs.
4. Distance from house for wintertime use.
5. Nighttime lighting.
6. Locate the swim spa with an awareness to sunlight exposure, views, access, property lines, lighting, wind direction, shielding, septic tanks, plants, trees. (Chemicals in the swim spa water splashed from your swim spa may damage nearby plant life.)
7. Consider the location of the nearest bathroom or dressing room.
8. If your swim spa is to be located on a second story, be positive support is adequate. Call your builder and a structural engineer.
9. Area for placement of support equipment where adequate space will be needed to gain access to components for maintenance and general servicing.
10. Be sure to note any other considerations, such as aesthetics or privacy concerns, that may affect the safety or your enjoyment.
11. Provide adequate drainage away from the equipment and adequate elevation to allow draining by siphon, should it be required.
12. Location of electrical supply. 120/240 volt systems require hard wire installed from the electrical source to the swim spa support pack terminal. ALL EQUIPMENT MUST BE GROUND FAULT CIRCUIT PROTECTED (NOT SUPPLIED) AT THE POWER SOURCE. ALL ELECTRICAL WIRING OF THE SWIM SPA SUPPORT EQUIPMENT MUST COMPLY WITH THE NATIONAL ELECTRIC CODE.
13. Locations at least 5 ft (1.52 m) from all metal surfaces. (A swim spa may be installed within 5 feet of metal surfaces providing each metal surface is permanently connected by a No. 6AWG (8.4 mm²) copper conductor attached to the wire connector on the terminal box provided for this purpose.) ALL INSTALLATIONS MUST COMPLY WITH ARTICLE 680 OF THE U.S. NATIONAL ELECTRIC CODE AND ANSI/NFPA 70-1984.



Partially or Fully Recessed Installations:

PDC Spas does not recommend this type of installation, although if this is what you have chosen for your new swim spa, please review the following considerations.

1. A system for preventing collection and pooling of water must be designed in accordance to local authorities.
2. If installed in designated floodways, additional attention to maximum water load entering that floodway must be addressed to prevent water from accumulating below grade. The swim spa is not designed to be submerged in water and will void all warranties.

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install. All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.



Model Specifications - FX219s

Partially or Fully Recessed Installations (cont'd):

- Unit must be level and self-supporting and NEVER backfilled with sand, gravel or dirt. This will void all warranties.
- Plan for complete drainage.
- Must have proper ventilation so equipment does not overheat.
- Must provide at least 3 feet of access around all sides of the swim spa. Warranty does not cover costs associated with gaining access for service and maintenance.
- Below grade drainage needs to be evaluated based upon specific region rainfalls. This analysis must be performed by a qualified local engineer to ensure proper drainage.



SYNERGY™

GENERAL

rev. 2016/05

Seating Capacity	6 seats, 2 RX6, fitness area
Shell Material	Acrylic
Fitness Area	118" approx.
Dimensions (Domestic)	227" x 92" x 56"
Dimensions (Export)	578 cm. x 234 cm x 142 cm.
Water Capacity	2525 Gallons (9,558 liters)
Dry Weight	2,475 lbs. (1123 kg.)
Skirt Material	Permawood™
Water Flow	1,038 GPM

WATER SYSTEM** (photo ref.)

EverPure™ Treatment System	OZ	2
Pristine Filter	F	3
Slide Valves		10
Synergy Jet	S	6
MegaSwirl Jet	A	2
Large Euro Jet w/ Eyeball	E	24
Mega'ssage Jet	G	21
Ozone Jet	O	4
Diverter Valves	V	2
Safety Suction	U	12
Air Control	I	8
MotionGlow™ Light	L	2
Lighted Water Spouts	W	6
Water Spout Control	CV	2
Bypass Jet	B	2

SPECIAL FEATURES


Spa Pillows	2
Highlights2™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump #1	1	2.0 HP	2.0 HP
Spa Pump #2	2	4.0 HP	4.0 HP
Swim Spa Seating Pump	3	2.0 HP	2.0 HP
Swim Pump #1	4	6.0 HP	6.0 HP
Swim Pump #2	5	6.0 HP	6.0 HP
Electronics			
Electrical Can (spa end), (swim end)	6, 7	Waterway Neo 2100 Series (each)	Waterway Neo 2100 Series (each)
Voltage (spa end), (swim end)		120/240, 120/240	230 / 230
Amperage (spa end), (swim end)		50, 50	1x32, 1x32
Heater (spa end), (swim end)	H1, H2	5.5 KW, 5.5KW	3.0 KW, 3.0KW
Operation System			
Spa Side Control (spa end), (swim end)	8, 9	Waterway Neo 2100 Series(each)	Waterway Neo 2100 Series(each)

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install.

All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

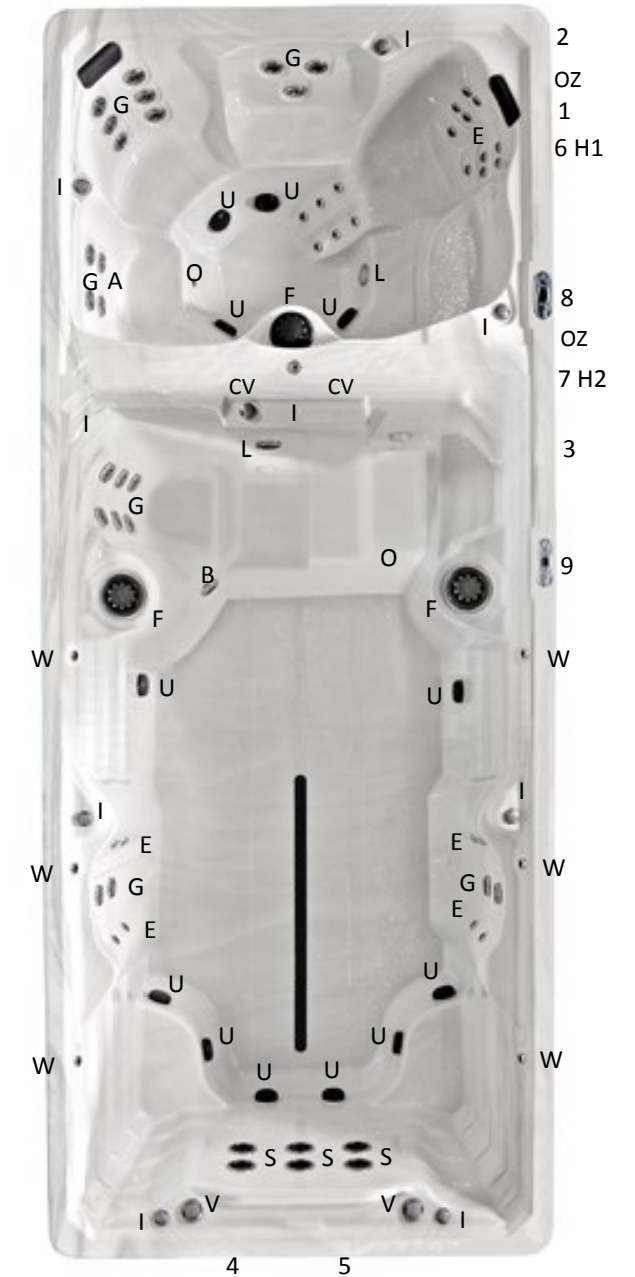

Model Specifications - FX219

SYNERGY™

GENERAL

rev. 2016/05

Seating Capacity	6 seats, 2 RX6, fitness area
Shell Material	Acrylic
Fitness Area	100" approx.
Dimensions (Domestic)	227" x 92" x 56"
Dimensions (Export)	578 cm. x 234 cm x 142 cm.
Water Capacity	2425 Gallons (9,180 liters)
Dry Weight	2,475 lbs. (1123 kg.)
Skirt Material	Permawood™
Water Flow	1,038 GPM

WATER SYSTEM** (photo ref.)


EverPure™ Treatment System	OZ	2
Pristine Filter	F	3
Slide Valves		10
Synergy Jet	S	6
MegaSwirl Jet	A	2
Large Euro Jet w/ Eyeball	E	42
Mega'ssage Jet	G	21
Ozone Jet	O	4
Diverter Valves	V	2
Safety Suction	U	12
Air Control	I	9
MotionGlow™ Light	L	2
Lighted Water Spouts	W	6
Water Spout Control	CV	2

SPECIAL FEATURES

Spa Pillows	3
Highlights2™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump #1	1	2.0 HP	2.0 HP
Spa Pump #2	2	4.0 HP	4.0 HP
Swim Spa Seating Pump	3	4.0 HP	4.0 HP
Swim Pump #1	4	6.0 HP	6.0 HP
Swim Pump #2	5	6.0 HP	6.0 HP
Electronics			
Electrical Can (spa end), (swim end)	6, 7	Waterway Neo 2100 Series (each)	Waterway Neo 2100 Series (each)
Voltage (spa end), (swim end)		120/240, 120/240	230, 230
Amperage (spa end), (swim end)		50, 50	1x32, 1x32
Heater (spa end), (swim end)	H1, H2	5.5 KW, 5.5KW	3.0 KW, 3.0 KW
Operation System			
Spa Side Control (spa end), (swim end)	8, 9	Waterway Neo 2100 Series (each)	Waterway Neo 2100 Series (each)

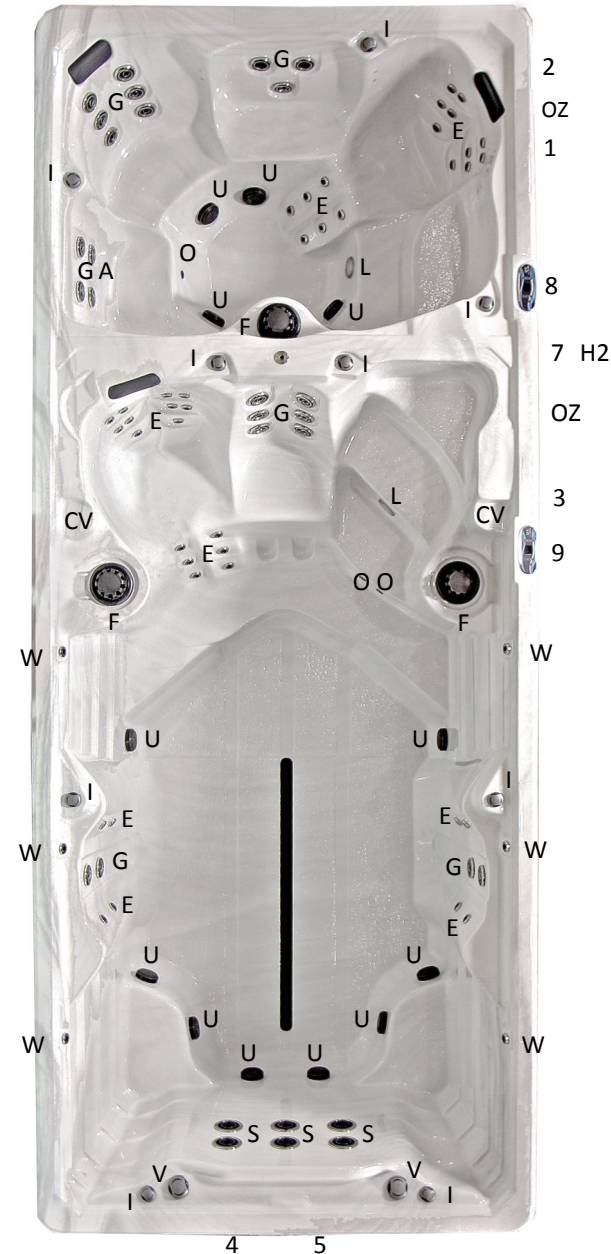

Wiring Guidelines

ELECTRICAL REQUIREMENTS

HAVE YOUR ELECTRICIAN READ THE FOLLOWING INFORMATION BEFORE INSTALLATION BEGINS.

Electrical connections made improperly, or the use of wire gauge sizes for incurring power which are too small, may continually blow fuses in the electrical equipment support box, may damage the internal electrical controls and components, may be unsafe and in any case will void the swim spa warranty.

It is the responsibility of the swim spa owner to ensure that electrical connections are made by a qualified electrician in accordance with the National Electrical Code and any local and state electrical codes in force at the time of installation.

IMPORTANT !!

ALL EQUIPMENT MODELS ARE 120/240 VOLT, 60 CYCLE FOR STATE-SIDE, U.S. INSTALLATIONS, AND 50 HZ FOR EXPORT, CE, INSTALLATIONS.

All swim spas must be permanently connected.

All swim spa support systems are multiple supply circuits.

All swim spa systems require the installation of a ground fault circuit interrupter (GFCI) protector or equivalent; (RCD, for export installs), at the power source (NOT SUPPLIED BY PDC SPAS) by a qualified electrician in accordance with all codes and regulations. Refer to typical GFCI installation photos and illustrations on the following pages.


Prior to each use, testing of the GFCI (or equivalent RCD) is required! Refer to the maintenance section of this manual for instructions

All swim spa support equipment must be bonded (grounded) to the pressure connector located within the control support box as well as the outside of the control support box. (see wiring schematic below and references on following pages)

Disconnect all electrical supplies and contact a qualified technician before servicing.

All swim spa installations are to be performed by a licensed electrician and in accordance with all local and national codes.

Swim Spa Wiring Schematic for Certified Electricians' Reference Only

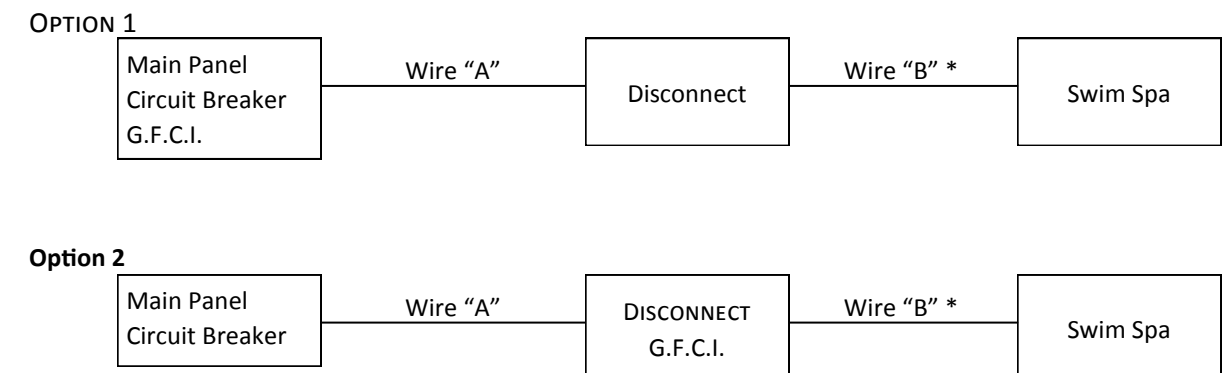

* National U.S. code recommends distance not to exceed 15 ft.

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install.

All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Model Specifications - FX17

SYNERGY™

GENERAL rev. 2016/05

Seating Capacity	2 seats, 2 RX6, fitness area
Shell Material	Acrylic
Fitness Area	136"
Dimensions (Domestic)	204" x 92" x 56"
Dimensions (Export)	427 cm. x 234 cm x 142 cm.
Water Capacity	2420 Gallons (9,161 liters)
Dry Weight	1,784 lbs. (810 kg.)
Skirt Material	Permawood™
Water Flow	647 GPM

WATER SYSTEM** (photo ref.)


EverPure™ Treatment System	OZ	1
Pristine Filter	F	2
Slide Valves		6
Synergy Jet	S	6
Large Euro Jet w/ Eyeball	E	26
Mega'ssage Jet	G	10
Ozone Jet	O	2
Diverter Valves	V	2
Safety Suction	U	8
Air Control	I	6
MotionGlow™ Light	L	1
Lighted Water Spouts	W	6
Water Spout Control	CV	2

SPECIAL FEATURES

Spa Pillows	1
Highlights™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*



ELECTRICAL SYSTEM

Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump	1	4.0 HP	4.0 HP
Spa Pump #1	2	6.0 HP	6.0 HP
Spa Pump #2	3	6.0 HP	6.0 HP
Electronics			
Electrical Can	6	Waterway Neo 2100 Series	Waterway Neo 2100 Series
Voltage		120/240	230
Amperage		50	1x32
Heater	H	5.5 KW	3.0 KW
Operation System			
Main Spa Side Control	7	Waterway Neo 2100 Series	Waterway Neo 2100 Series

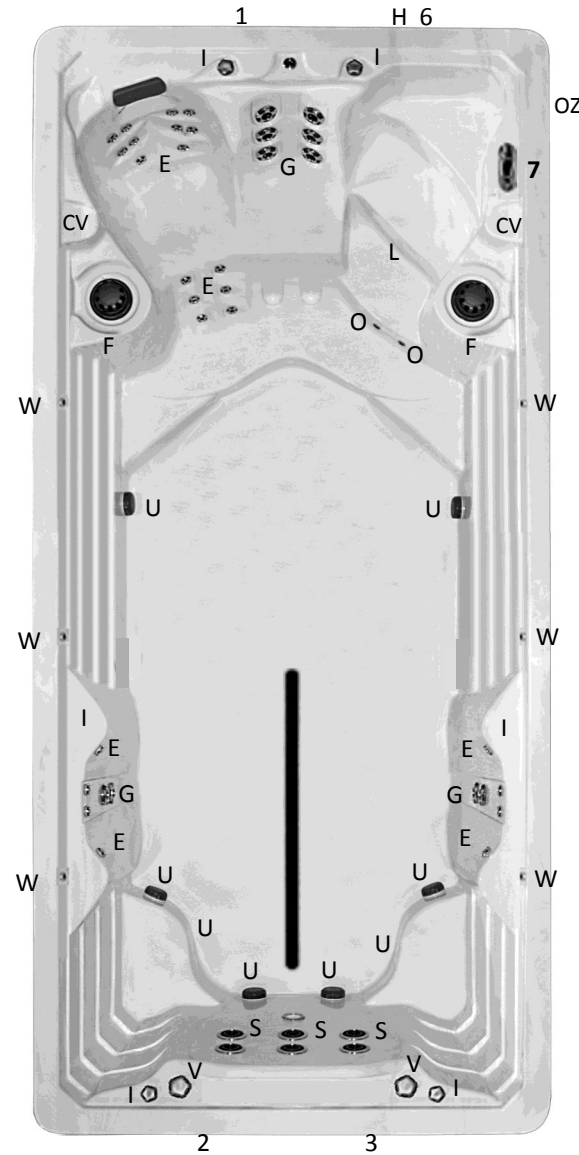

Model Dimensions



A = 129" B = 53 3/8" C = 19 1/2"

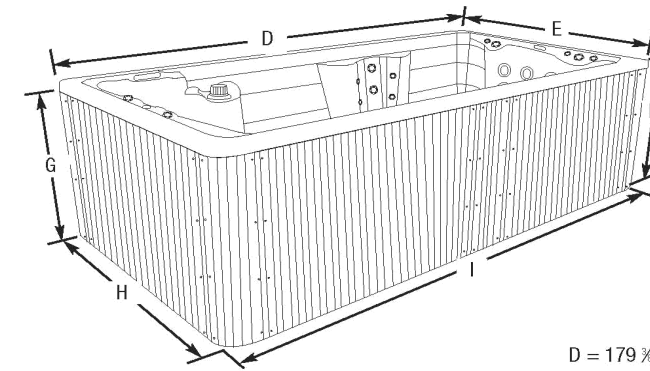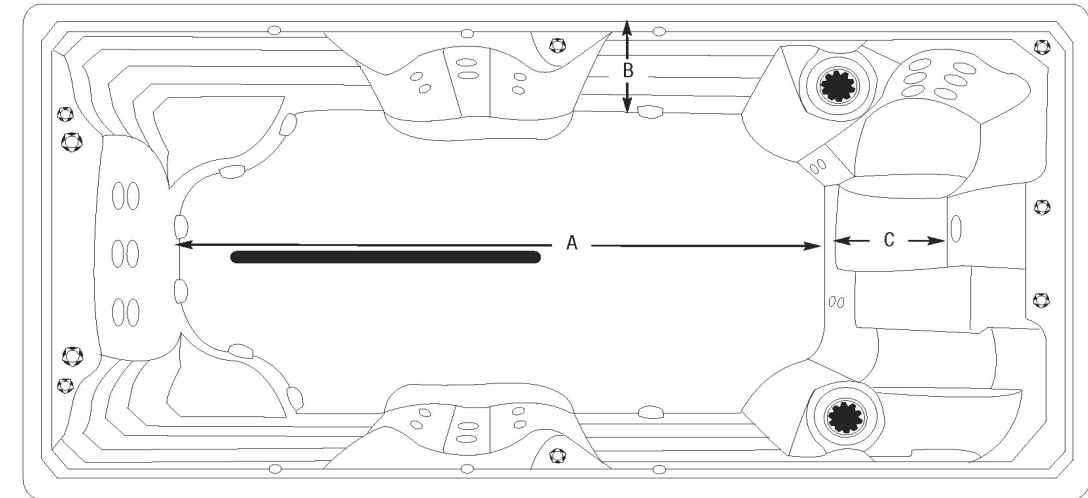

D = 179 3/8" E = 91 1/4" F = 55 3/8" G = 51 1/8" H = 90 1/2" I = 178 1/4"

SYNERGY™ FX15

A = 111" B = 53 3/8" C = 7 1/2"

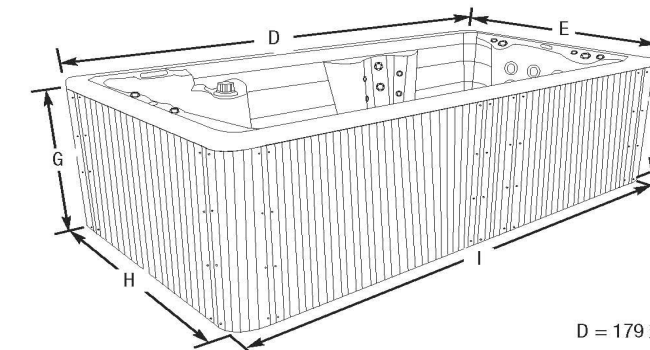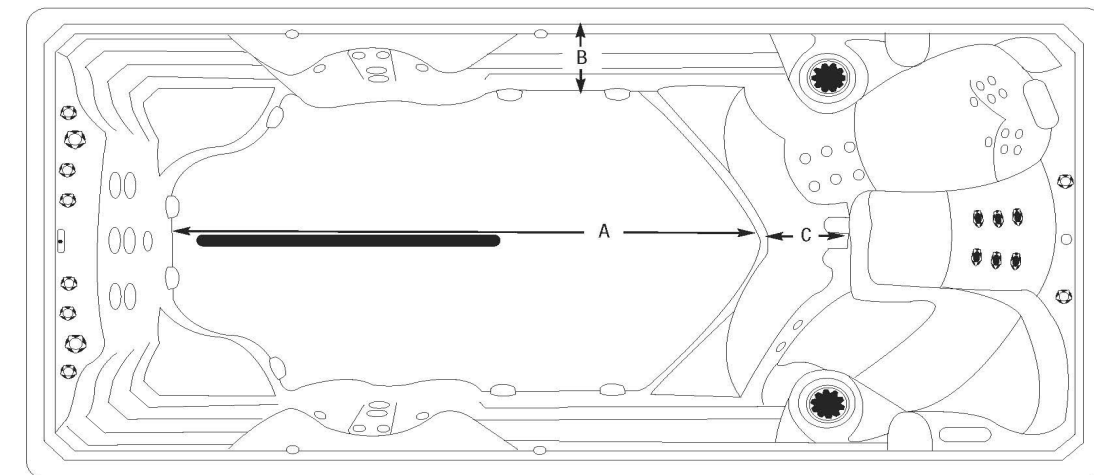



SYNERGY™ FX15s

D = 179" E = 91" F = 55" G = 51" H = 90" I = 178 1/4"

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install.
All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Model Dimensions



A = 135" B = 53 7/8" C = 7 1/2"

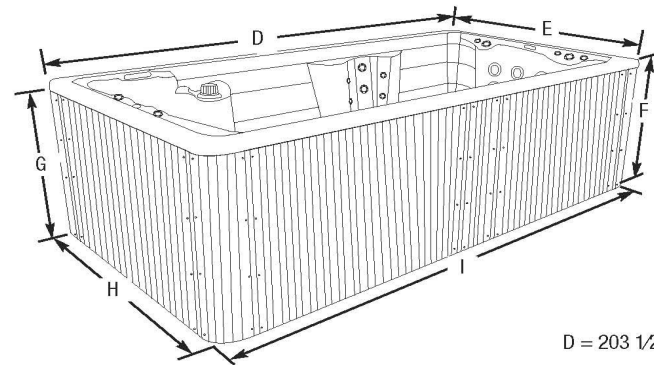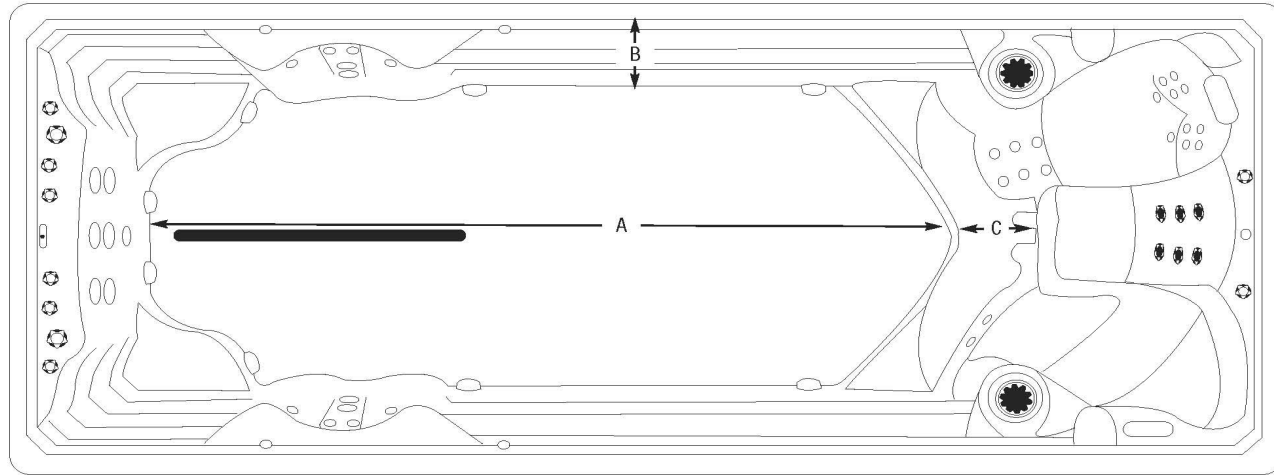

D = 203 1/2" E = 91 1/4" F = 55 5/8" G = 51 7/8" H = 90 1/2" I = 202 7/8"

SYNERGY™
FX17

A = 159" B = 53 7/8" C = 7 1/2"

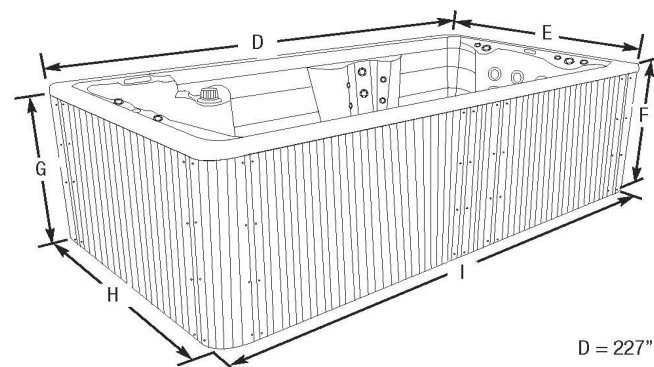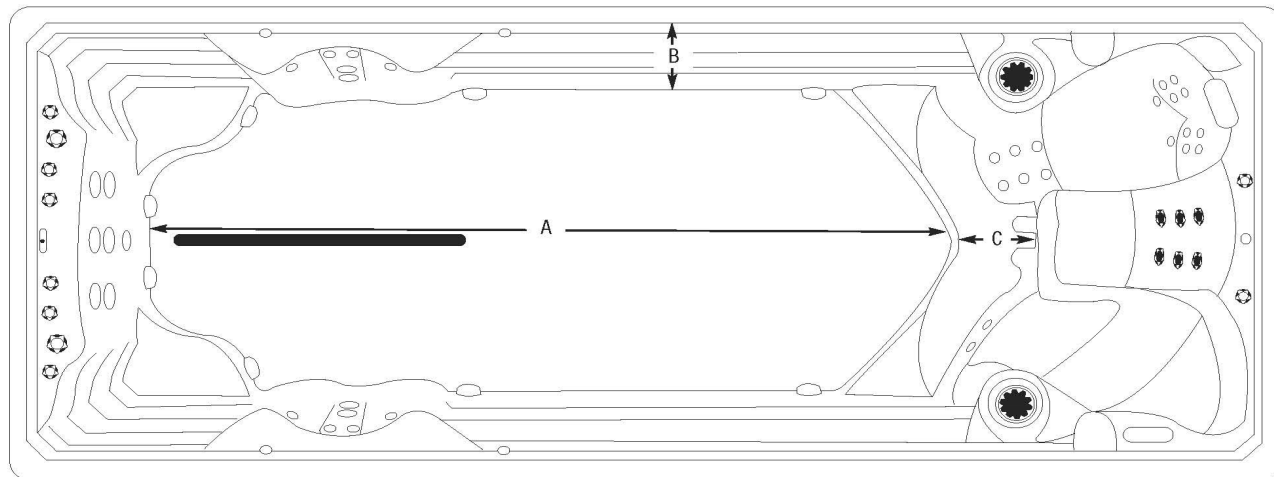

D = 227" E = 91 1/4" F = 55 5/8" G = 51 7/8" H = 90 1/2" I = 225 1/2"

SYNERGY™
FX19

Model Specifications - FX15s

SYNERGY™

GENERAL

rev. 2016/05

Seating Capacity	2 seats, 2 RX6, fitness area
Shell Material	Acrylic
Fitness Area	130" approx.
Dimensions (Domestic)	180" x 92" x 56"
Dimensions (Export)	427 cm. x 234 cm x 142 cm.
Water Capacity	2240 Gallons (8,479 liters)
Dry Weight	1,645 lbs. (746 kg.)
Skirt Material	Permawood™
Water Flow	647 GPM

WATER SYSTEM** (photo ref.)


EverPure™ Treatment System	OZ	1
Pristine Filter	F	2
Slide Valves		6
Synergy Jet	S	6
Large Euro Jet w/ Eyeball	E	8
Mega'ssage Jet	G	10
Ozone Jet	O	2
Diverter Valves	V	2
Safety Suction	U	8
Air Control	I	5
MotionGlow™ Light	L	1
Lighted Water Spouts	W	6
Water Spout Control	CV	2
Bypass Jet	B	2

SPECIAL FEATURES

Spa Pillows	1
Highlights™ LED lighting	Standard
Stainless Steel Jetting	Standard
Eclipse™ LED cabinet lighting	Optional
BlueTune™ Audio	Optional*

ELECTRICAL SYSTEM



Pump Information	Reference Number	Domestic (60Hz)	Export (50Hz)
Spa Pump	1	4.0 HP	4.0 HP
Spa Pump #1	2	6.0 HP	6.0 HP
Spa Pump #2	3	6.0 HP	6.0 HP
Electronics			
Electrical Can	6	Waterway Neo 2100 Series	Waterway Neo 2100 Series
Voltage		120/240	230
Amperage		50	1x32
Heater	H	5.5 KW	3.0 KW
Operation System			
Main Spa Side Control	7	Waterway Neo 2100 Series	Waterway Neo 2100 Series

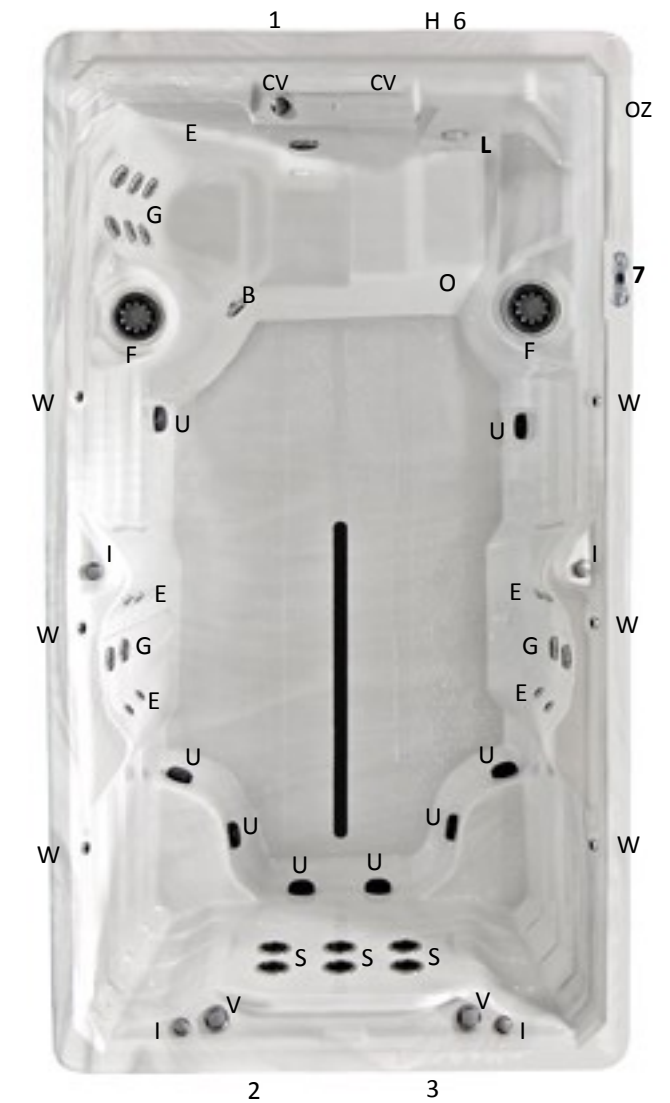

** Not every jet is referenced. Each type of jet is noted for ease of identification. *Note location of audio components prior to install. All specifications are accurate at time of print. Manufacturer reserves the option to change product without prior notice. Dimensions are approximate.

Model Dimensions

A = 104" B = 53 3/8" C = 19 1/2"

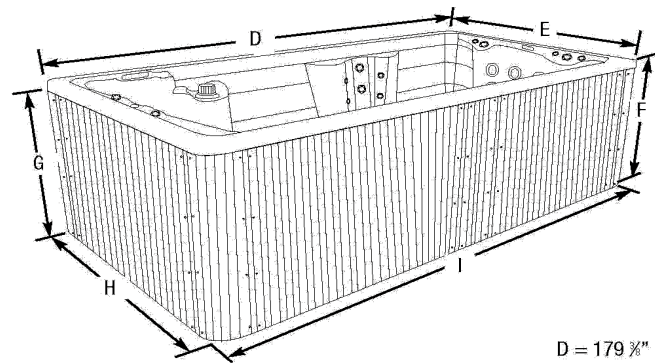
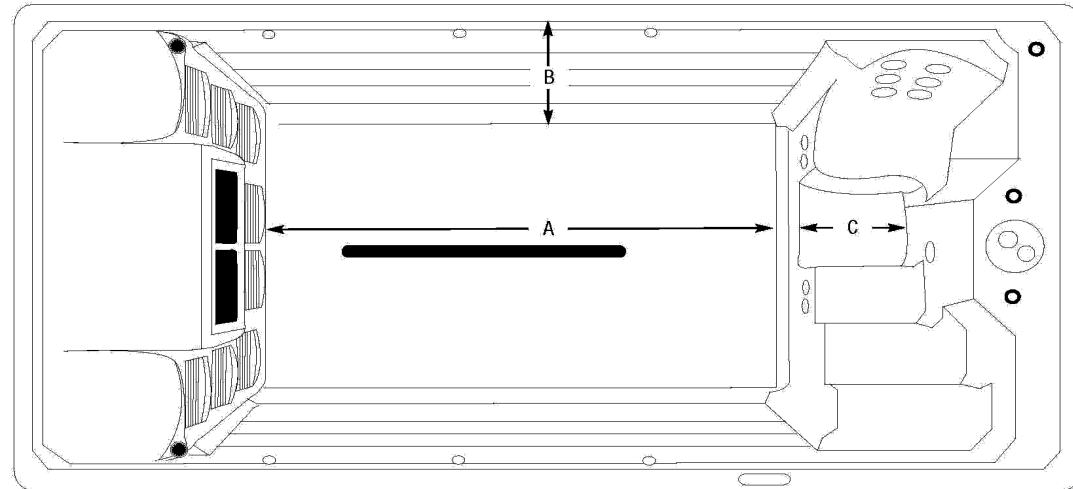


D = 179 3/8" E = 91 1/4" F = 55 3/8" G = 51 7/8" H = 90 1/2" I = 178 1/4"

TruSwim™
TSX15

Model Dimensions



A = 141 1/2" B = 53 3/8" C = 13"

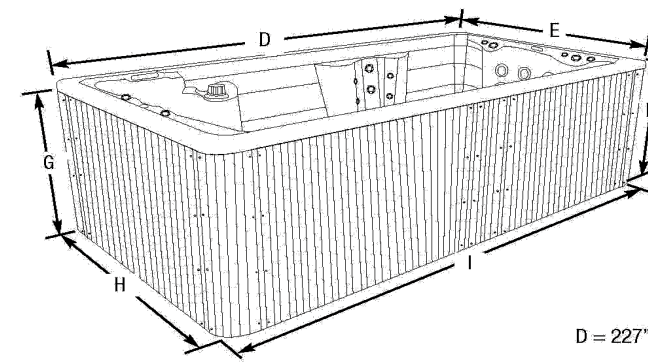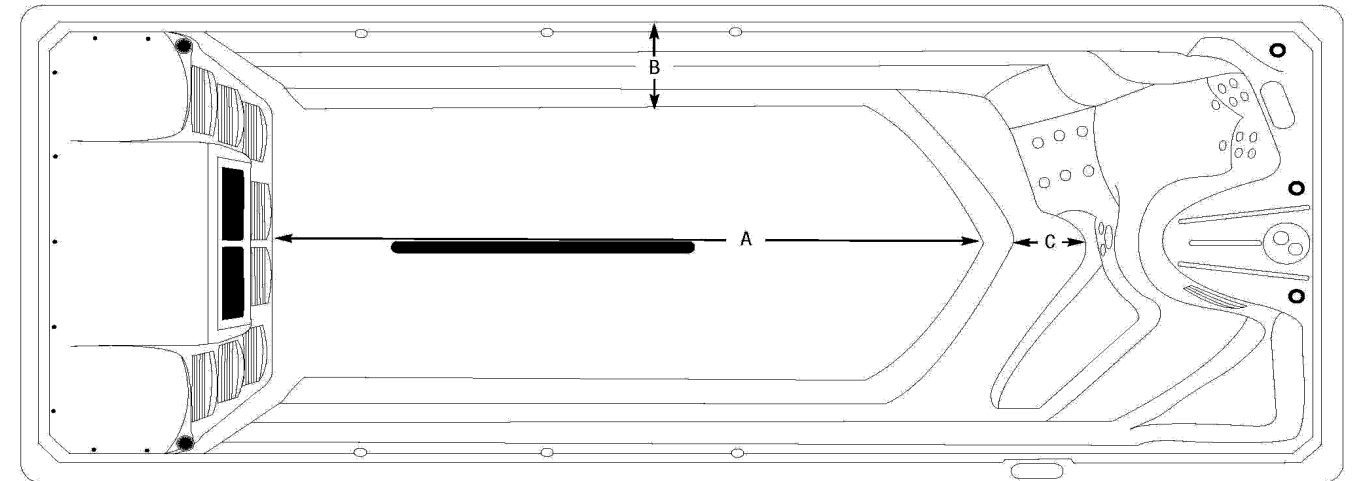

D = 227" E = 91 1/4" F = 55 3/8" G = 51 7/8" H = 90 1/2" I = 225 1/2"

TruSwim™
TSX19



A = 117 1/2" B = 53 3/8" C = 13"

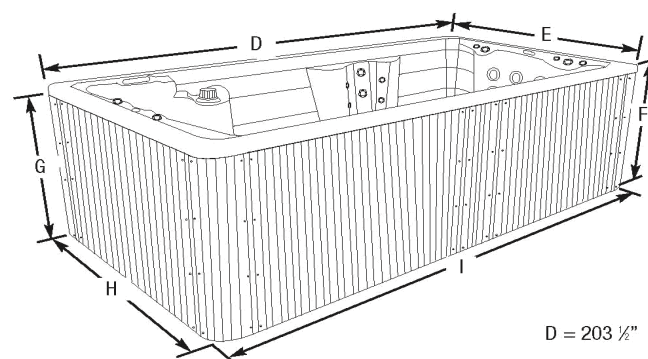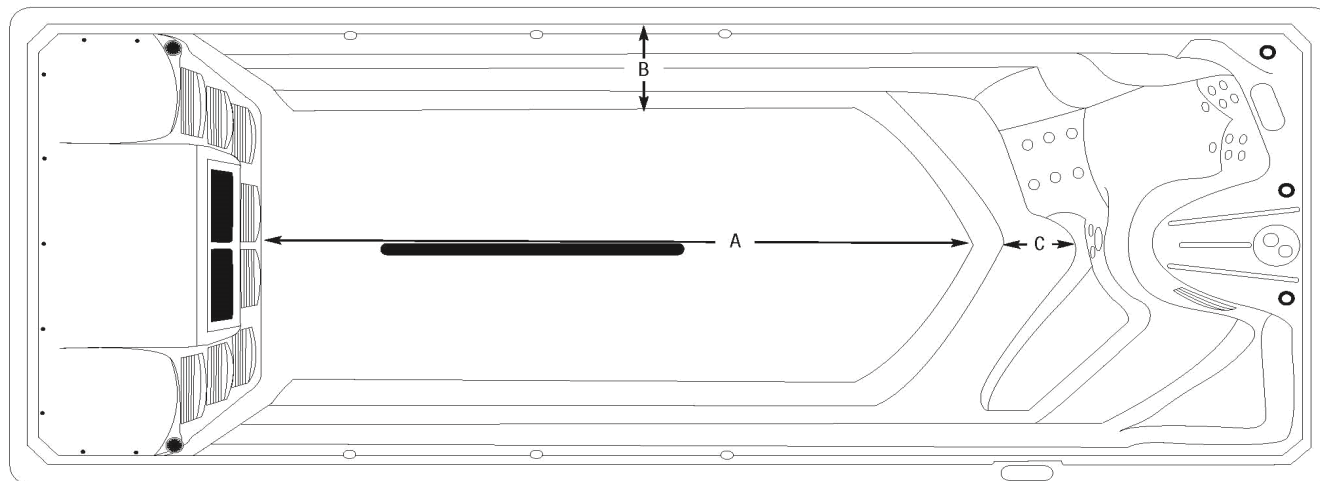

D = 203 1/2" E = 91 1/4" F = 55 3/8" G = 51 7/8" H = 90 1/2" I = 202 3/4"

TruSwim™
TSX17

A = 91" B = 53 3/8" C = 19 1/2" J = 63 3/4"

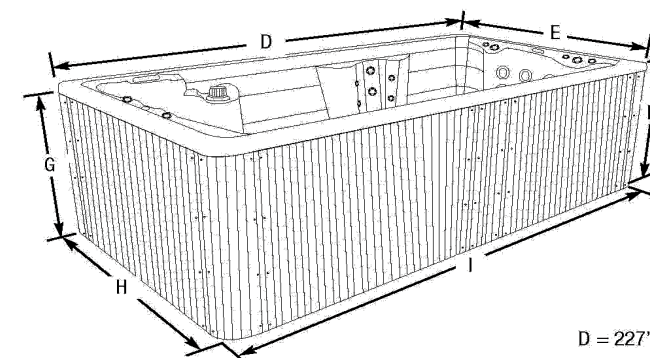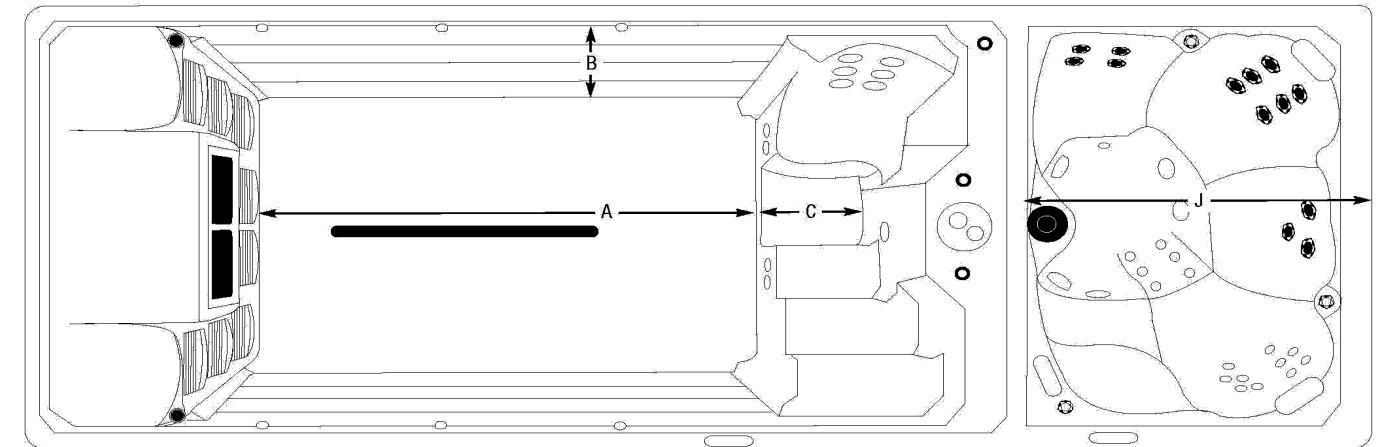

D = 227" E = 91 1/4" F = 55 3/8" G = 51 7/8" H = 90 1/2" I = 225 1/2"

TruSwim™
TSX219